

ONYX

DESIGNED TO SHINE 

JX, SX, ZX, TX Propane Floor Machine Illustrated Parts List



Patent Pending

Propane Floor Machine Illustrated Parts List




Patent Pending

Table of Contents:


| | |
|---------------------------|----|
| Unit Assembly | 3 |
| Optional Upgrades | 4 |
| Deck Assembly | 5 |
| Tensioner Assembly | 6 |
| Engine Pulley Assembly | 6 |
| Front End Assembly | 7 |
| Pad Driver Assembly | 8 |
| Shroud Assembly Shroud | 9 |
| Bolt & Spring Asm. Bottle | 9 |
| Carrier Assembly Tee | 10 |
| Handle Assembly | 11 |
| Electrical Components | 12 |
| Clutch System | 13 |
| Operator Presence System | 13 |
| Metal Pad Driver | 14 |
| Assembly Water System | 15 |
| Weight Kit | 16 |
| Headlight Kit | 16 |
| Planetary Disk | 17 |
| Planetary Shaft | 18 |
| Service Part List | 19 |
| Labels & Literature | 20 |

Unit Assembly

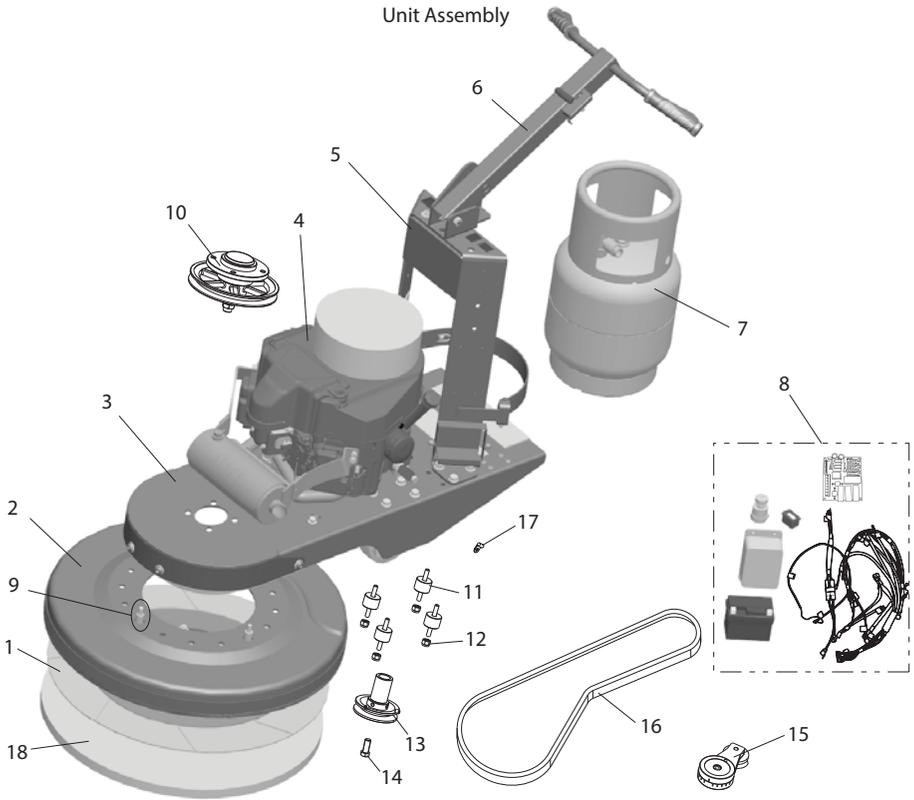


| Item | Part No. | Description | Qty |
|------|-----------------------|---|-----|
| 1 | W10666 | Pad Driver ASM - 27" w/ Hex Hub, Bolt-Lock | 1 |
| | W10667 | Pad Driver ASM - 24" w/ Hex Hub, Bolt-Lock | |
| | W10668 | Pad Driver ASM - 21" w/ Hex Hub, Bolt-Lock | |
| 2 | W10518 | Shroud ASM - 27" | 1 |
| | W10522 | Shroud ASM - 24" | |
| | W10521 | Shroud ASM - 21" | |
| 3 | W10519 | Deck ASM | 1 |
| 4 | Engine - LX600, LX700 | <i>For engine specific parts, refer to the engine IPL</i> | 1 |
| 5 | W10363 | Bottle Carrier ASM | 1 |
| 6 | W10364 | Tee Handle ASM | 1 |
| 7 | W2502-FK | LP Cylinder - 20LB Vertical, Steel, RH | 1 |
| 8 | W10520 | Electrical Components | 1 |
| 9 | W10598 | Shroud Bolt & Spring ASM | 4 |
| 10 | W10658 | Front End ASM | 1 |
| 11 | W10366 | Vibration Isolating Spacer - 3/8-16 x M10 | 4 |
| 12 | W10367 | Nylock Nut - M10, Zinc | 4 |
| 13 | W10368 | Engine Pulley ASM | 1 |
| 14 | F17159 | Bolt - HCS 7/16-20 X 1.5 Z5 | 1 |
| 15 | W10517 | Rotary Tensioner ASM | 1 |
| 16 | WBX51 | 51" Cogged Belt | 1 |
| 17 | F0216763 | P Clamp - 1/4 in. EDPM Cushion | 1 |
| 18 | W40230 | 27" General Purpose Burnishing Pad | 1 |
| | W40224 | 24" General Purpose Burnishing Pad | |
| | W40221 | 21" General Purpose Burnishing Pad | |

Optional Upgrades & Features

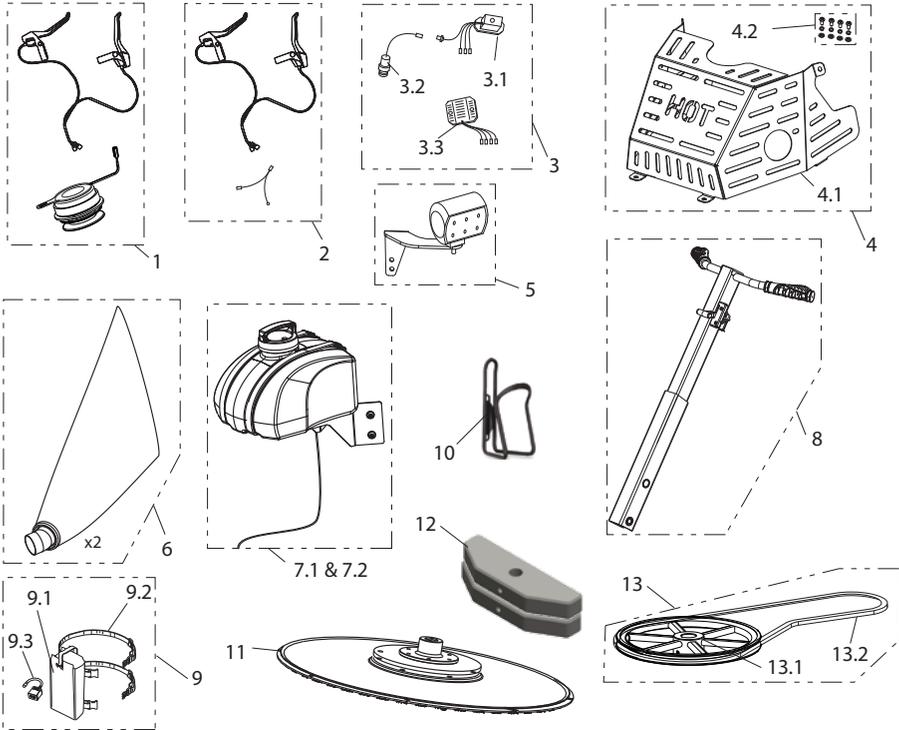


| Item | Part No. | Description | Qty |
|------|--------------------|---|-----|
| 1 | W10516 | Clutch System | 1 |
| 2 | W10527 | Operator Presence System | 1 |
| 3 | W10515 | Emission Monitoring System | 1 |
| 3.1 | W0091A | Emission Module ASM | 1 |
| 3.2 | PT-W2803 | O2 Sensor, Exhaust, Narrow Band | 1 |
| 3.3 | W10738 | Voltage Regulator - AC to 12VDC | 1 |
| 4 | For Reference Only | Muffler Heat Shield ASM | 1 |
| 4.1 | W10541 | Muffler Heat Shield | 1 |
| 4.2 | W10543 | Muffler Heat Shield Hardware ASM | 1 |
| 5 | W10544 | Headlight ASM | 1 |
| 6 | W10549 | Dust Bag - 2 Pack | 1 |
| 7.1 | W10523 | 5 Gallon Water System | 1 |
| 7.2 | W10736 | 8 Gallon Water System | 1 |
| 8 | W10536 | Telescoping Handle System | 1 |
| 9 | W10545 | USB Charging Port & Phone Holster | 1 |
| 9.1 | W10591 | Phone Holster - Nylon | 1 |
| 9.2 | W10590 | Velcro Cinch Strap - 1x12 in. | 2 |
| 9.3 | W10554 | USB Charging Port - 2.1 Amp | 1 |
| 10 | W10580 | Drink Holder (Cage) w/ Hardware | 1 |
| 11 | W10669 | 27" Metal Pad Driver ASM - Hex Stock Hub, bolt lock | 1 |
| 12 | W10613 | Weight Kit - 25 lb | 1 |
| 13 | For Reference Only | 14 Inch Pulley Kit (for slower pad RPM) | 1 |
| 13.1 | W10537 | 14 in Pulley & Hardware | 1 |
| 13.2 | WBX61 | 61" Cogged Belt | 1 |

Deck Assembly

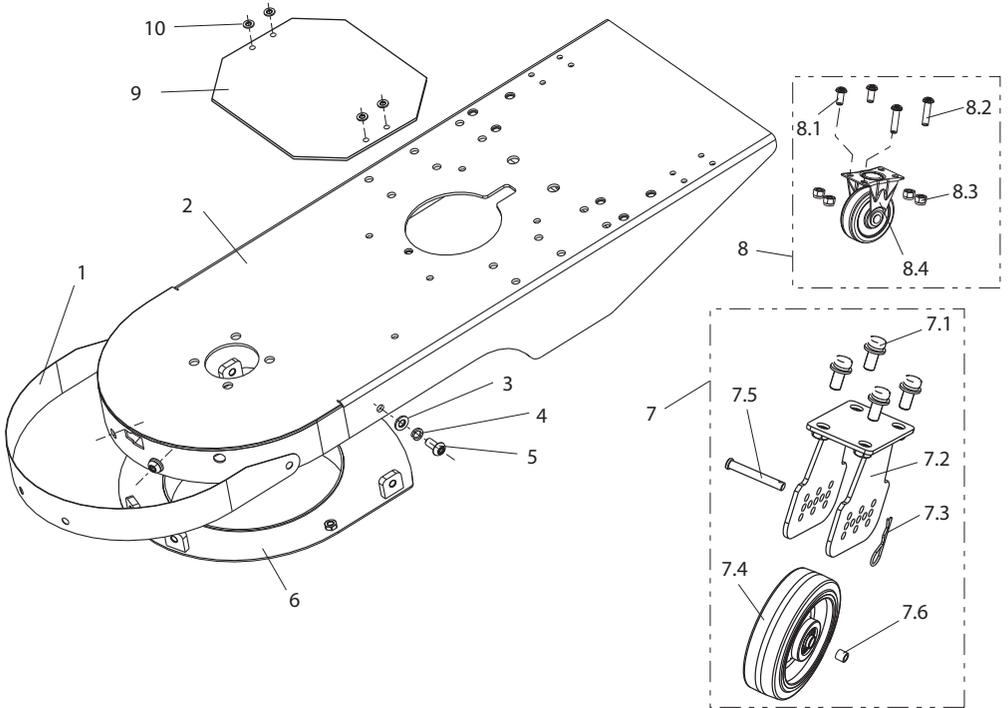


| Item | Part No. | Description | Qty |
|------|----------|--|-----|
| 1 | W10369 | Front Cover | 1 |
| 2 | W10370 | Deck | 1 |
| 3 | W10371 | Flat Washer - M12, Zinc | 4 |
| 4 | W10372 | Split Lock Washer - M12, Zinc | 4 |
| 5 | W10373 | Bolt - BHSCS, M12x25, Zinc, 8.8 | 4 |
| 6 | W10374 | Deck Underside Cover | 1 |
| 7 | W10375 | Wheel ASM | 2 |
| 7.1 | W10376 | Bolt - HHCS Combo, M12x35, Zinc, 8.8 | 4 |
| 7.2 | W10377 | Wheel Bracket | 1 |
| 7.3 | W10378 | Hairpin - 57mm Length | 1 |
| 7.4 | W4220 | Rubber Wheel 6 x 1-1/2 x 3/8 ID Ball Bearing | 1 |
| 7.5 | W10380 | Wheel Axle | 1 |
| 7.6 | W10650 | Sleeve Spacer 3/8ID x 3/8Length | 1 |
| 8 | W10381 | Rear Caster ASM | 2 |
| 8.1 | W10382 | Bolt - BHSCS, M8x20, Zinc, 8.8 | 2 |
| 8.2 | W10383 | Bolt - BHSCS, M8x25, Zinc, 8.8 | 2 |
| 8.3 | W10384 | Nylock Nut - M8, Zinc | 4 |
| 8.4 | W10385 | Rear Caster - 3 in. | 1 |
| 9 | W10386 | Pad - LP Tank Bottom Support | 1 |
| 10 | W10387 | Flat Washer - M8, Zinc | 4 |

Tensioner Assembly

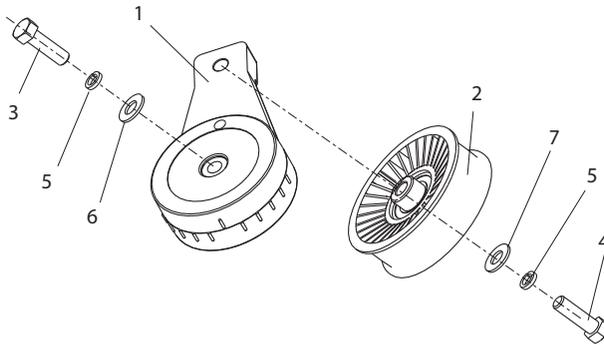


| Item | Part No. | Description | Qty |
|------|----------|---|-----|
| 1 | W1101 | Rotary Tensioner Arm | 1 |
| 2 | W1184 | Pulley for Rotary Tensioner w/ 0.51" shoulder | 1 |
| 3 | F13107 | Hex Cap Screw 3/8x16 x 1-1/4 Grade 5 Zinc | 1 |
| 4 | F13110 | Bolt - HCS 3/8-16 x 1 3/4 Grade 5 Zinc | 1 |
| 5 | F33622 | Lock Washer - 3/8 Zinc Medium Split | 2 |
| 6 | F33008 | Flat Washer - 3/8 I.D. USS Zinc | 1 |
| 7 | F1133082 | SAE Flat Washer - 3/8" x 0.812" OD Zinc | 1 |

Engine Pulley Assembly

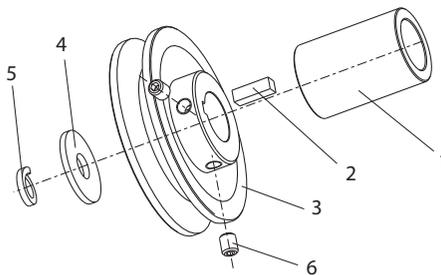


| Item | Part No. | Description | Qty |
|------|----------|-------------------------------|-----|
| 1 | W10412 | Crankshaft Sleeve | 1 |
| 2 | W10413 | Key - 1/4 x 1/4 x 20mm | 1 |
| 3 | W10414 | Engine Pulley - 4 in. | 1 |
| 4 | W10415 | Flat Washer - M13, Zinc | 1 |
| 5 | W10372 | Split Lock Washer - M12, Zinc | 1 |
| 6 | W10416 | Set Screw - M6x12 | 2 |

Front End Assembly

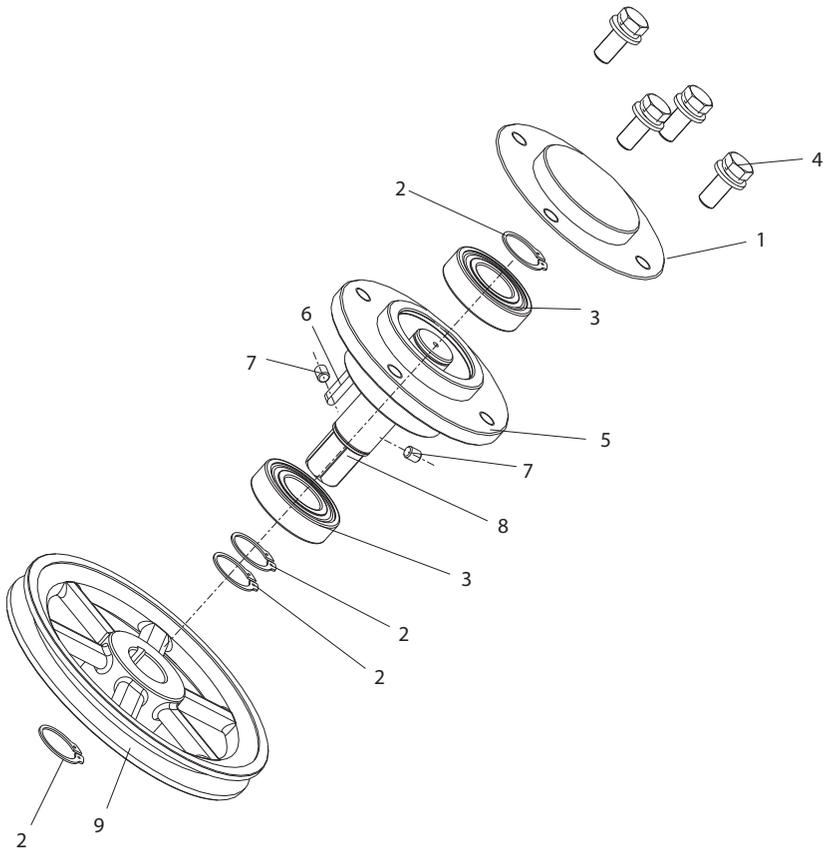


| Item | Part No. | Description | Qty |
|------|----------|---|-----|
| 1 | W10739 | Bearing Cover - Steel | 1 |
| 2 | W10418 | External Shaft Circlip - 30mm | 4 |
| 3 | F0474395 | BEARING 6206 2RS1/C3 | 2 |
| 4 | W10420 | Bolt - HHCS Combo, M12x30, Zinc, 8.8 | 4 |
| 5 | W10421 | Bearing Housing | 1 |
| 6 | W10422 | Key - 1/4 x 1/4 x 28mm | 1 |
| 7 | W10416 | Set Screw - M6x12 | 2 |
| 8 | W10657 | Shaft - Front End, Hex Drive, Bolt-Lock | 1 |
| 9 | W10424 | Pulley - 7.9 in | 1 |

Pad Driver Assembly

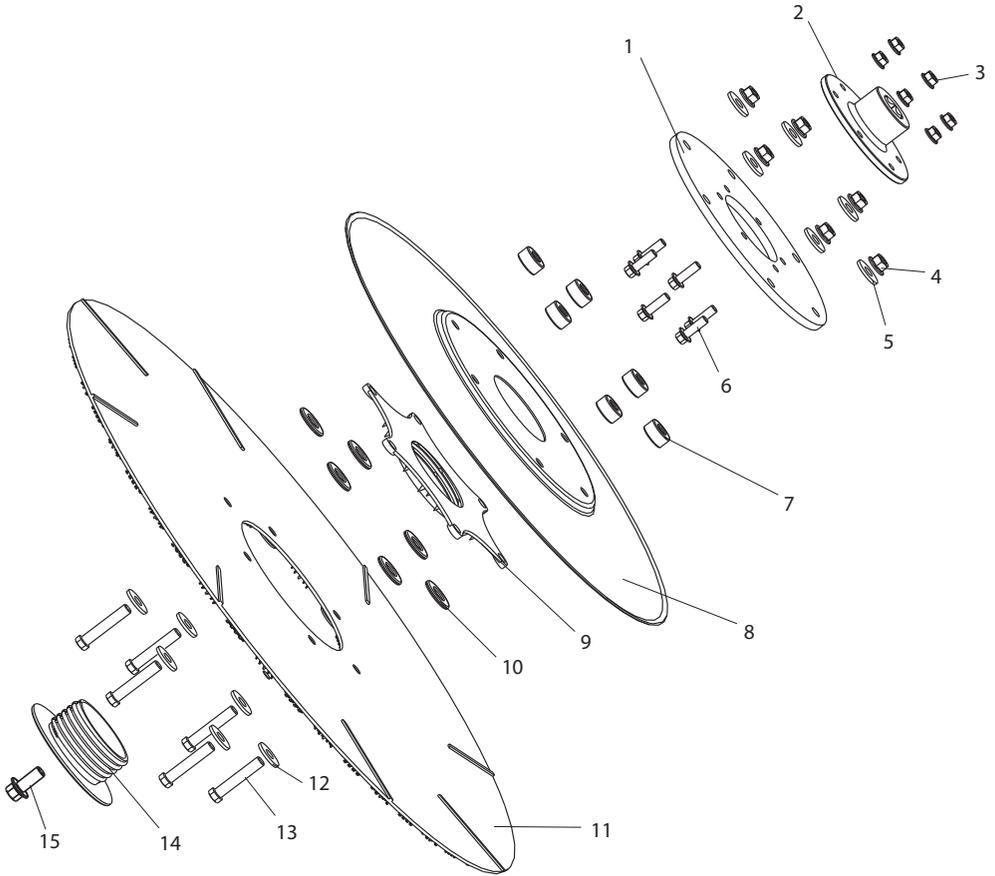


| Item | Part No. | Description | Qty |
|------|----------|---|-----|
| 1 | W10425 | Flex Plate | 1 |
| 2 | W10655 | Shaft Coupler Hub - Hex Hole, Bolt Lock | 1 |
| 3 | W10384 | Nylock Nut - M8, Zinc | 6 |
| 4 | W10367 | Nylock Nut - M10, Zinc | 6 |
| 5 | W10427 | Flat Washer - M10, Zinc | 6 |
| 6 | W10428 | Hex Flanged Bolt - M8x25, Zinc | 6 |
| 7 | W10429 | Spacer - Flex Plate | 6 |
| 8 | W10430 | Pad Riser - Steel | 1 |
| 9 | W10431 | Pad Holder - Female Housing | 1 |
| 10 | W10432 | Flat Washer - M10 x 30 x 1.5 mm | 6 |
| 11 | W10433 | Pad Gripper Surface - 27" | 1 |
| | W10434 | Pad Gripper Surface - 24" | |
| | W10435 | Pad Gripper Surface - 21" | |
| 12 | W10427 | Flat Washer - M10, Zinc | 6 |
| 13 | W10436 | Bolt - HHCS M10x55, Short Head, Zinc, 8.8 | 6 |
| 14 | W10437 | Pad Holder - Male Threaded Flange | 1 |
| 15 | W10656 | Bolt - HHCS Combo, M12x25, Zinc, 8.8 | 1 |

Shroud Assembly

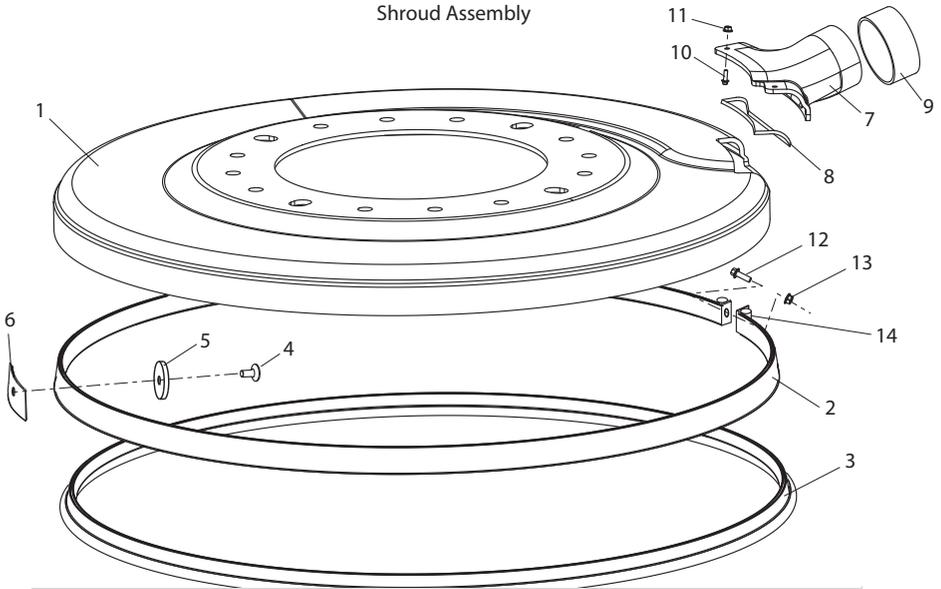


| Item | Part No. | Description | Qty |
|------|----------|--|-----|
| 1 | W10442 | Shroud - 27" | 1 |
| | W10443 | Shroud - 24" | |
| | W10444 | Shroud - 21" | |
| 2 | W11170 | Strap, Seal - Stainless Steel, 27 in Shroud | 1 |
| | W11171 | Strap, Seal - Stainless Steel, 24 in Shroud | |
| | W11172 | Strap, Seal - Stainless Steel, 21 in Shroud | |
| 3 | W11179 | Shroud Seal w/ Adhesive back, Flexible PVC, Cut to Fit | 1 |
| 4 | W11177 | Bolt, M5x20, FHSCS Stainless | 10 |
| 5 | W11176 | Countersunk Washer, M5, 35 OD x 3 Thick | 10 |
| 6 | W11178 | Rounded Clip Nut, M5, Zinc | 10 |
| 7 | W10538 | Dust Chute - 27&24 in. Compatible | 1 |
| | W10594 | Dust Chute - 21 in. Compatible | |
| 8 | W10597 | Foam Gasket - Dust Chute | 1 |
| 9 | W10539 | Cap - Dust Chute | 1 |
| 10 | W10595 | Flange Bolt - M6x16 Zinc | 4 |
| 11 | W10596 | Nylock Nut - M6, Zinc | 4 |
| 12 | W11174 | Bolt - M5x65, Hex Head Flange, Zinc | 1 |
| 13 | W11175 | Nylock Nut, M5, Zinc | 1 |
| 14 | W11173 | Round Pin w/ M5 Clearance Hole | 2 |

Shroud Bolt & Spring Assembly

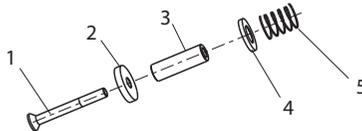


| Item | Part No. | Description | Qty |
|------|----------|--------------------------------------|-----|
| 1 | W10451 | FHCS Bolt - M10x75, Zinc, Grade 8.8 | 1 |
| 2 | W10450 | Washer - Countersunk Hole | 1 |
| 3 | W10449 | Sleeve Spacer | 1 |
| 4 | W10453 | Flat Washer - 19.5 ID x 30 OD x 2 mm | 1 |
| 5 | W10452 | Compression Spring | 1 |

Bottle Carrier Assembly

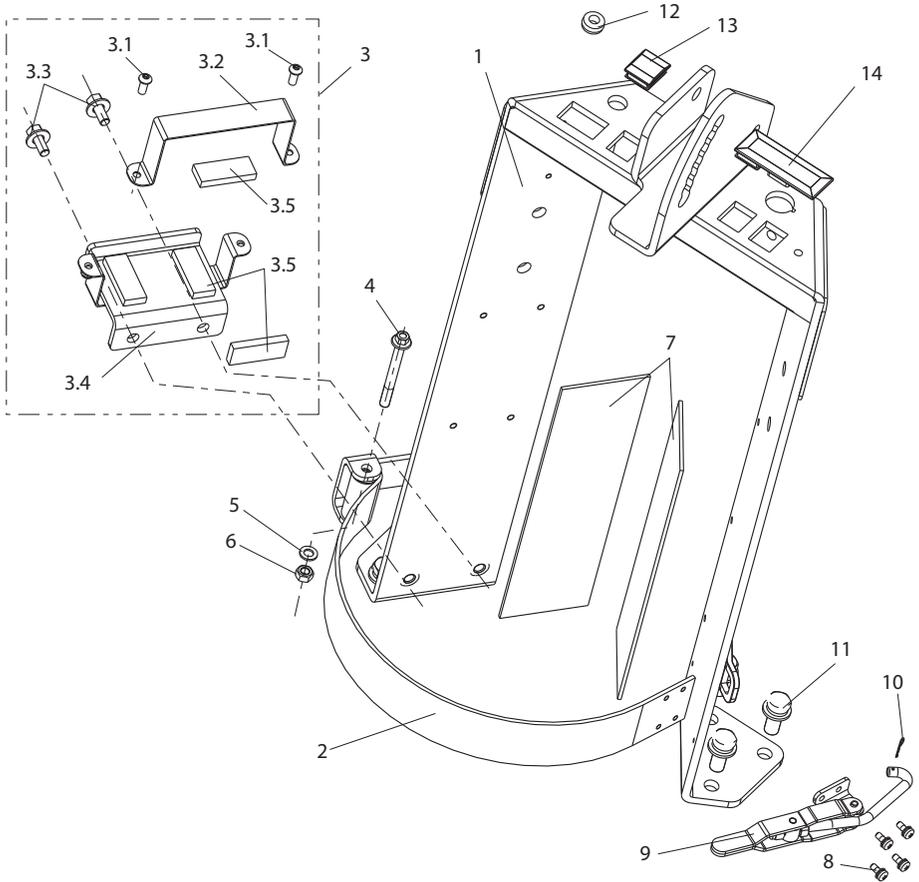


| Item | Part No. | Description | Qty |
|------|----------|--|-----|
| 1 | W10454 | Bottle Carrier | 1 |
| 2 | W10455 | Tank (Propane) Strap | 1 |
| 3 | W10456 | Battery Box ASM | 1 |
| 3.1 | W10457 | Bolt - BHSCS, M6x16, Zinc, 8.8 | 2 |
| 3.2 | W10458 | Battery Clamp Top w/ Electrical Insulation | 1 |
| 3.3 | W10459 | Bolt - HHCS Combo, M10x25, Zinc, 8.8 | 2 |
| 3.4 | W10460 | Battery Support Bracket | 1 |
| 3.5 | W10461 | Foam - 50x20x7 mm | 4 |
| 4 | W10462 | Hex Flanged Bolt - M8x75 | 1 |
| 5 | W10387 | Flat Washer - M8, Zinc | 1 |
| 6 | W10384 | Nylock Nut - M8, Zinc | 1 |
| 7 | W10463 | Foam - 280x80x5 mm | 2 |
| 8 | W10464 | Machine Screw - PPH M5x10, Zinc | 4 |
| 9 | W10465 | Clamp Mechanism | 1 |
| 10 | W10466 | Hairpin | 1 |
| 11 | W10376 | Bolt - HHCS Combo, M12x35, Zinc, 8.8 | 6 |
| 12 | W10467 | Rubber Grommet - 16.5 mm hole | 1 |
| 13 | W10468 | Hole Plug - Water Controls | 1 |
| 14 | W10469 | Hole Plug - Head Light Switch | 1 |

Tee Handle Assembly

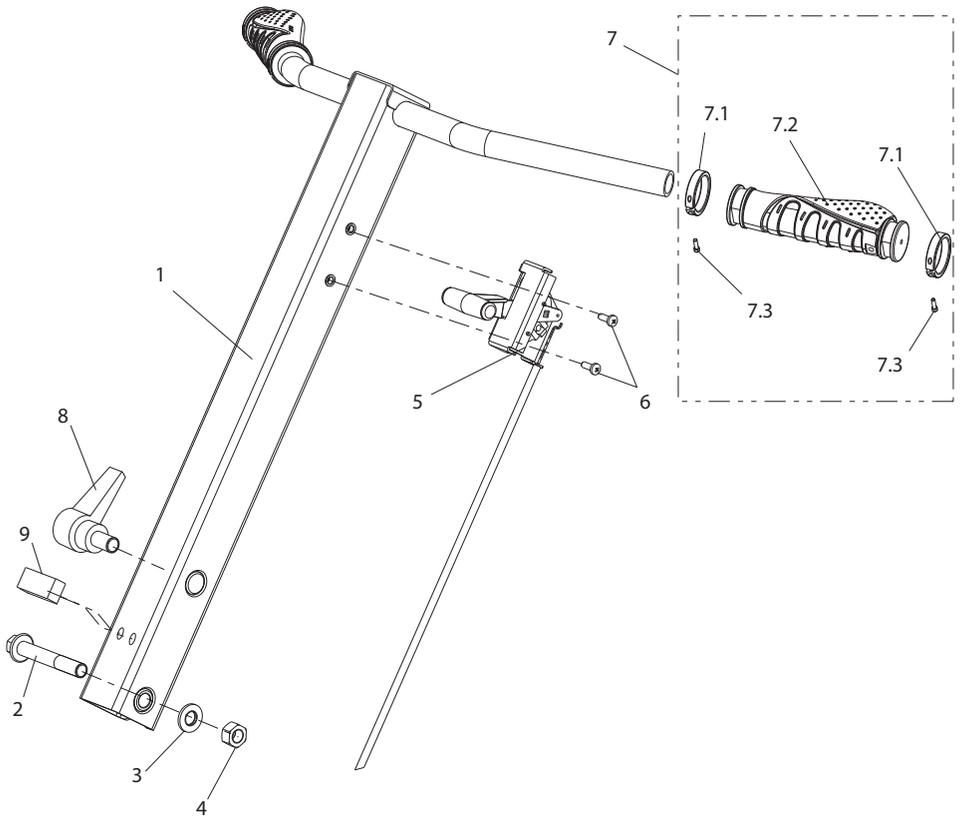


| Item | Part No. | Description | Qty |
|------|----------|--|-----|
| 1 | W10470 | Tee Handle | 1 |
| 2 | W10471 | Hex Flanged Bolt - M12x80, Zinc, 8.8 | 1 |
| 3 | W10371 | Flat Washer - M12, Zinc | 1 |
| 4 | W10472 | Nylock Nut - M12, Zinc | 1 |
| 5 | W4110 | Throttle CABLE 53 INCH | 1 |
| 6 | W10474 | Machine Screw - PPH M5x16, Zinc | 2 |
| 7 | W10475 | Ergonomic Grip w/ Clamps (1 grip) | 2 |
| 7.1 | W10476 | Grip Clamp | 2 |
| 7.2 | W10477 | Ergonomic Grip | 1 |
| 7.3 | W10478 | Socket Head Cap Screw - M3x12, Zinc, 8.8 | 2 |
| 8 | W10552 | Knob - Tee Handle Adjustmt | 1 |
| 9 | W11180 | Bumper - Tee Handle | 1 |

Electrical Components

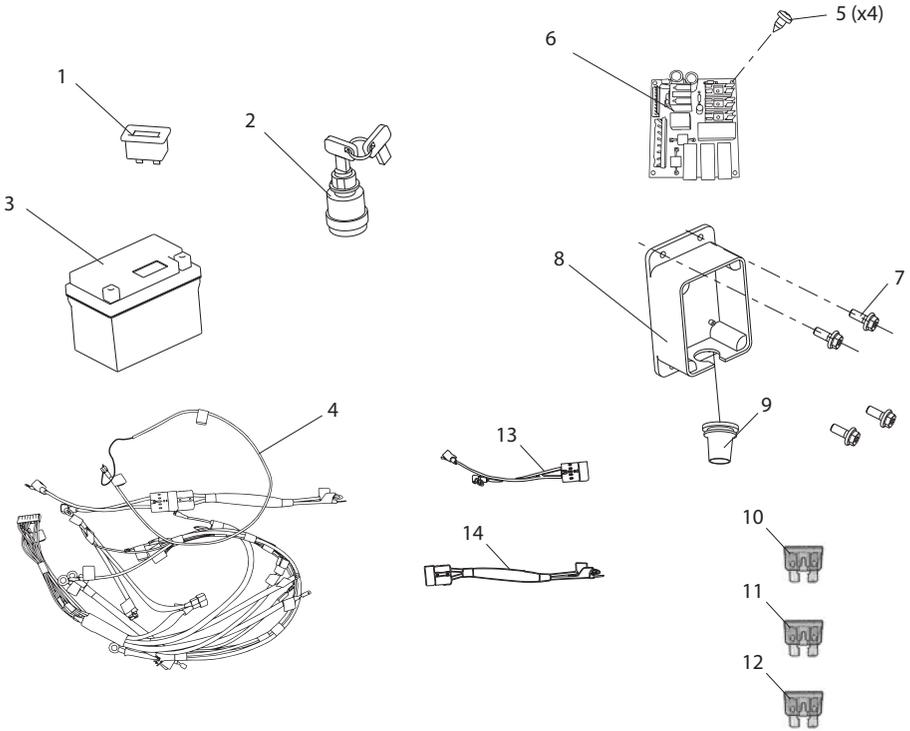


| Item | Part No. | Description | Qty |
|------|----------|---|-----|
| 1 | W10479 | Tach Hour Meter 1 Pin | 1 |
| 2 | W10480 | Ignition Switch - Incl 2 Keys, Hardware, 5 pin Wire Harness | 1 |
| 3 | W10481 | Battery - Li-Ion 12V | 1 |
| 4 | W10482 | Wire Harness | 1 |
| 5 | W10483 | Self Tapping Screw - ST3x6 | 4 |
| 6 | W10484 | Circuit Board | 1 |
| 7 | W10485 | Hex Flange Bolt - M6x12, Zinc | 4 |
| 8 | W10486 | Electronic Box & Cover | 1 |
| 9 | W10487 | Wire Grommet | 1 |
| 10 | W11196 | Fuse 3A, ATO Blade Type | 1 |
| 11 | W11197 | Fuse 7.5A, ATO Blade Type | 1 |
| 12 | W11198 | Fuse 15A, ATO Blade Type | 1 |
| 13 | W11166 | Cable - Battery to Connector | 1 |
| 14 | W11167 | Cable - Starter Solenoid to Battery Connector | 1 |

Clutch System

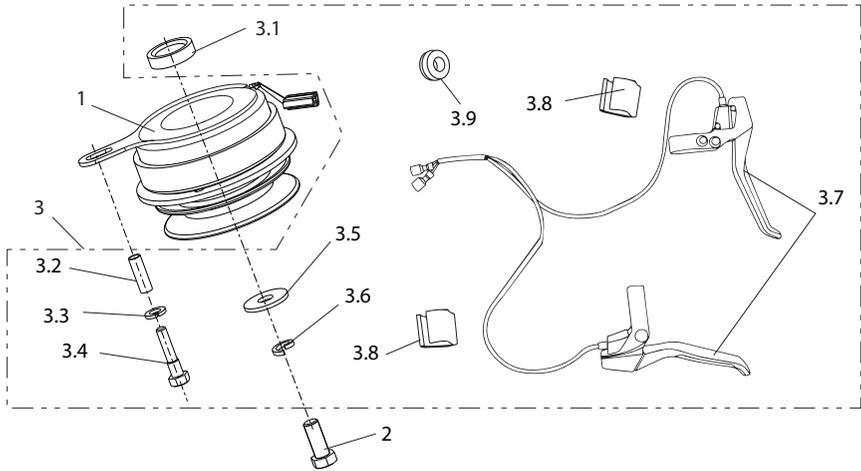


| Item | Part No. | Description | Qty |
|------|----------|--|-----|
| 1 | W1210 | CVX Electric Clutch CCW 12V w/ 4" Pulley | 1 |
| 2 | F17159 | Bolt - HCS 7/16-20 X 1.5 Z5 | 1 |
| 3 | W50010 | Clutch Component ASM (QJ) | 1 |
| 3.1 | W10493 | Spacer - 1" ID | 1 |
| 3.2 | W10494 | Sleeve - Clutch Arm Support Bolt | 1 |
| 3.3 | W10495 | Split Lock Washer - M10, Zinc | 1 |
| 3.4 | W10496 | Bolt - Clutch Arm Support | 1 |
| 3.5 | W10415 | Flat Washer - M13, Zinc | 1 |
| 3.6 | W10372 | Split Lock Washer - M12, Zinc | 1 |
| 3.7 | W10497 | Clutch Handle Set - Incl L+R+Wiring | 1 |
| 3.8 | W10498 | Wire Clip | 2 |
| 3.9 | W10499 | Rubber Grommet - 18 mm hole | 1 |

Operator Presence System

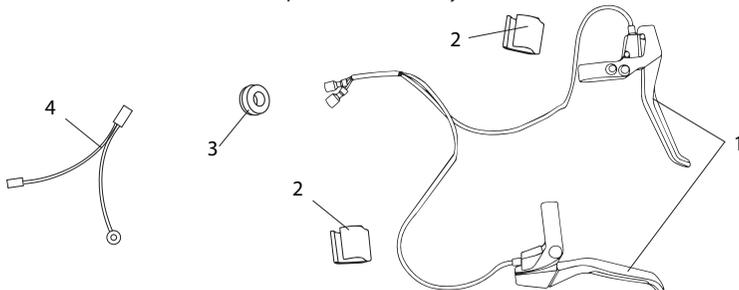


| Item | Part No. | Description | Qty |
|------|----------|---------------------------------------|-----|
| 1 | W10497 | Clutch Handle Set - Incl L+R+Wiring | 1 |
| 2 | W10498 | Wire Clip | 2 |
| 3 | W10499 | Rubber Grommet - 18 mm hole | 1 |
| 4 | W10528 | Wiring Harness - 3 way Union w/ Diode | 1 |

Metal Pad Driver

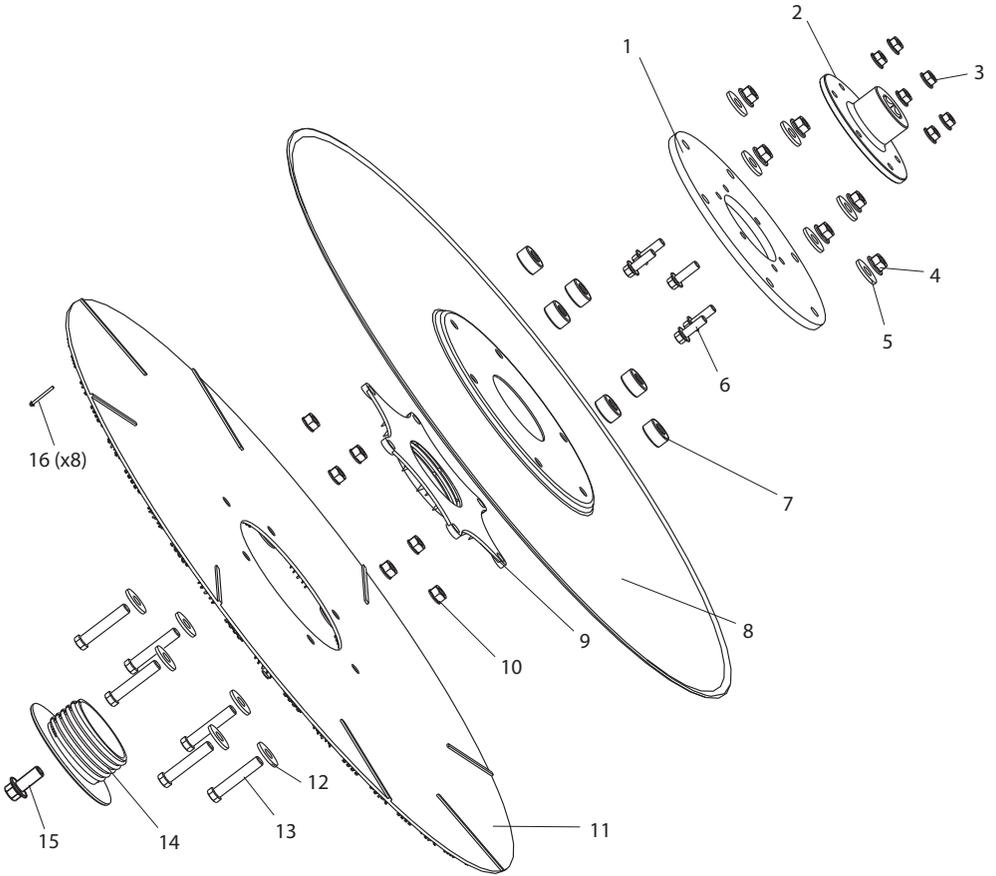


| Item | Part No. | Description | Qty |
|------|----------|---|-----|
| 1 | W10425 | Flex Plate | 1 |
| 2 | W10655 | Shaft Coupler Hub - Hex Hole, Bolt Lock | 1 |
| 3 | W10384 | Nylock Nut - M8, Zinc | 6 |
| 4 | W10367 | Nylock Nut - M10, Zinc | 6 |
| 5 | W10427 | Flat Washer - M10, Zinc | 6 |
| 6 | W10428 | Hex Flanged Bolt - M8x25, Zinc | 6 |
| 7 | W10429 | Spacer - Flex Plate | 6 |
| 8 | W5227 | 27 METAL SPUN DISK | 1 |
| 9 | W10431 | Pad Holder - Female Housing | 1 |
| 10 | W10367 | Nylock Nut - M10, Zinc | 6 |
| 11 | W10433 | Pad Gripper Surface - 27" | 1 |
| 12 | W10427 | Flat Washer - M10, Zinc | 6 |
| 13 | W10436 | Bolt - HHCS M10x55, Short Head, Zinc, 8.8 | 6 |
| 14 | W10437 | Pad Holder - Male Threaded Flange | 1 |
| 15 | W10656 | Bolt - HHCS Combo, M12x25, Zinc, 8.8 | 1 |
| 16 | F0162923 | Rivet 3/16 BLACK. Steel | 8 |

Water System

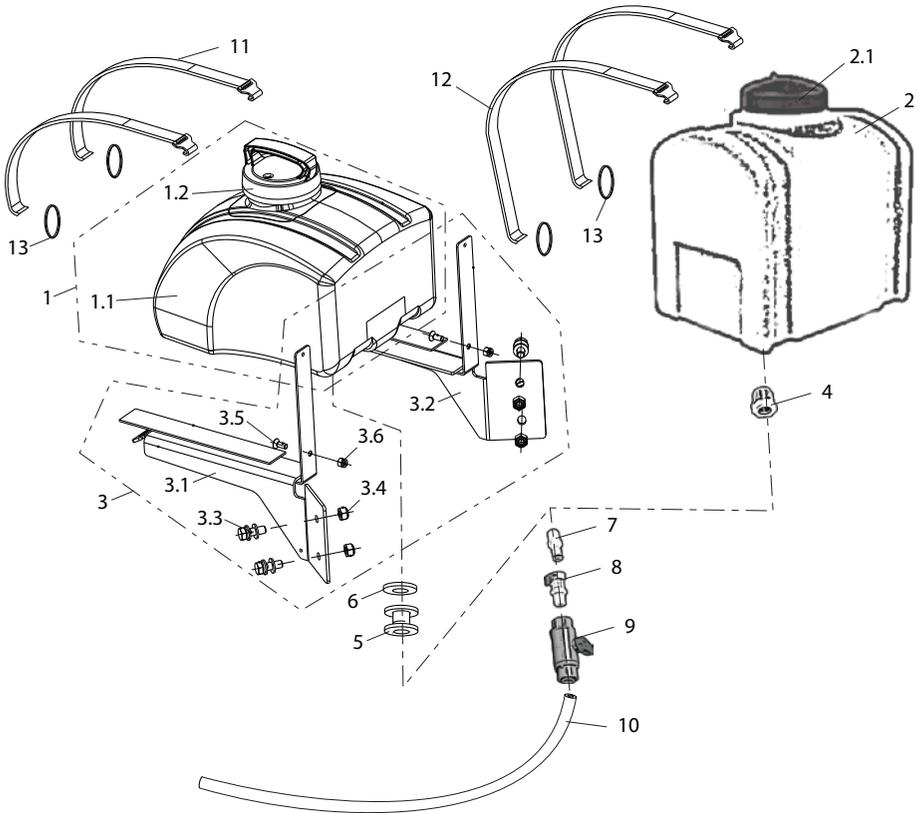


| Item | Part No. | Description | Qty |
|------|----------|--|-----|
| 1 | W10748 | 5 Gal Water Tank & Cap | 1 |
| 1.1 | W10562 | Water Tank - 5 Gallon, Black, HDPE | 1 |
| 1.2 | W10563 | Water Tank Cap - Black, w/ Rubber Seal | 1 |
| 2 | W8101 | 8 Gal Water TANK w/ Lid | 1 |
| 2.1 | W8100 | SOLUTION TANK CAP FOR W8101 TANK | 1 |
| 3 | W10747 | Water Tank Bracket Kit & Hardware | 1 |
| 3.1 | W10564 | Support Bracket - Water Tank, Oper. LH Side | 1 |
| 3.2 | W10565 | Support Bracket - Water Tank, Oper. RH Side | 1 |
| 3.3 | W10376 | Bolt - HHCS Combo, M12x35, Zinc, 8.8 | 4 |
| 3.1 | W10472 | Nylock Nut - M12, Zinc | 4 |
| 3.5 | W10575 | FHCS Bolt - M8x16, Zinc | 2 |
| 3.6 | W10384 | Nylock Nut - M8, Zinc | 2 |
| 4 | W10734 | Reducing Bushing 1/2" MNPT x 1/4" FNPT Nylon | 1 |
| 5 | W10568 | Bulkhead Fitting - 1/4 FNPT w/ Gaskets | 1 |
| 6 | F33446 | Machine Bushing - 1 X 10 GAGE | 1 |
| 7 | W10570 | Quick Disconnect - Male x 1/4" NPT, APC Series | 1 |
| 8 | W10569 | Quick Disconnect - Female x 1/4" NPT, APC Series | 1 |
| 9 | W10571 | Ball Valve - 3/8" OD Quick Connect x 1/4" FNPT | 1 |
| 10 | W10567 | Water Tubing - 3/8 OD, 1/4 ID, Polyethylene | 1 |
| 11 | W10573 | Rubber Strap - 19" w/ Hooks (for 5 gal tank) | 2 |
| 12 | W10735 | Rubber Strap - 25" w/ Hooks (for 8 gal tank) | 2 |
| 13 | W10574 | Key Ring - 1_1/2" OD, Zinc | 2 |

Weight Kit

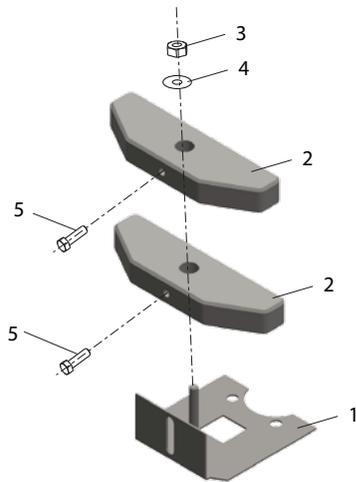


| Item | Part No. | Description | Qty |
|------|-----------|--|-----|
| 1 | W10614 | Weight Bracket - "X" Series Compatible | 1 |
| 2 | W10615 | Weight - 12.5 lb Trapezoid Shape | 2 |
| 3 | F37030 | Nylock 1/2-13 Nut NE Zinc | 1 |
| 4 | F11103744 | Thick Fender Washer - 1/2" x 1.500" OD, Zinc | 1 |
| 5 | F13205 | Hex Cap Screw Bolt 1/2-13 x 1.0 | 2 |

Headlight Kit

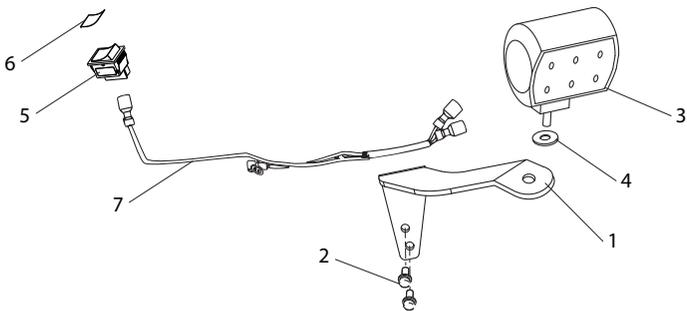


| Item | Part No. | Description | Qty |
|------|----------|---|-----|
| 1 | W10542 | Bracket - Headlight Mount | 1 |
| 2 | F0161824 | Hex Flange Bolt - M8x30, Zinc | 2 |
| 3 | W10588 | Headlight - LED 12V, 18W w/ Mount Hardware | 1 |
| 4 | W10693 | Rubber Washer - 5/16 ID x 1-1/4 OD x 1/16 thick | 1 |
| 5 | W10578 | Rocker Switch - 4 Pin DPST, KCD4 Type | 1 |
| 6 | W10584 | Label - Headlight Switch | 1 |
| 7 | W10589 | Wiring Harness - Headlight | 1 |

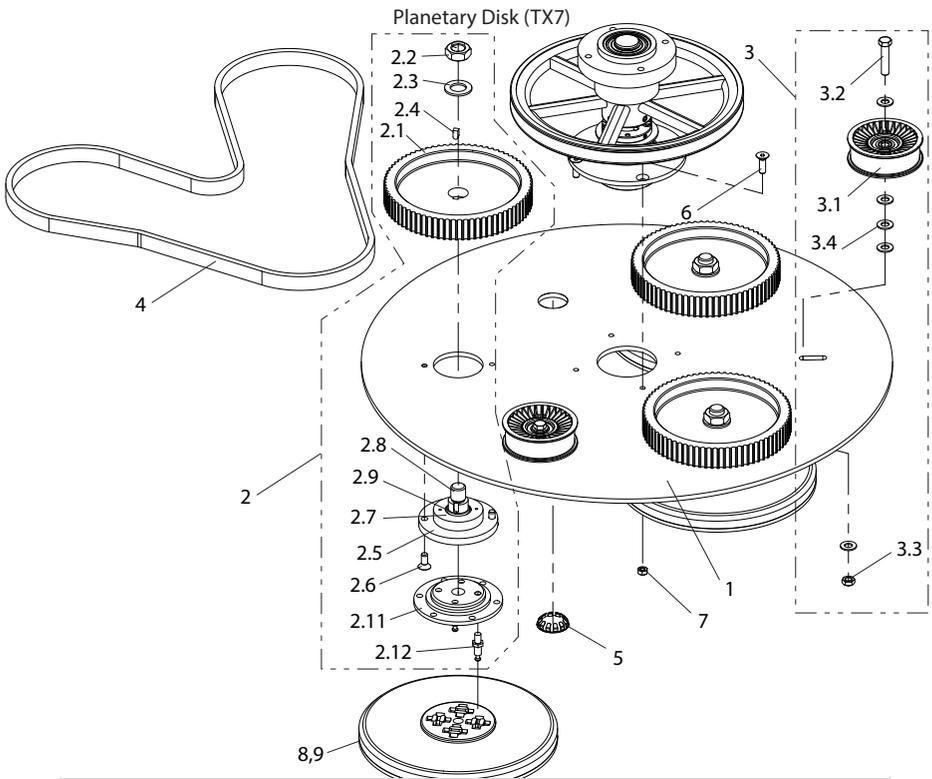

| Item | Part No. | Description | Qty |
|------|--------------|--|-----|
| 1 | W5120 | 27" TRISTRIP DISC | 1 |
| 2 | W4390A | Satellite Drive ASM | 3 |
| 2.1 | W6067 | 7.50" O.D. X 1" I.D. PULLEY (COGGED HTD-8MM) | 1 |
| 2.2 | F37041 | 3/4-10 Nylock Jam Nut | 1 |
| 2.3 | F33356 | 3/4" Belleville Washer .755 X 1.5 X .072, 1050/70 Plain | 1 |
| 2.4 | F0958695 | Machine KEY 1/4 X 1/4 X 1/2 | 1 |
| 2.5 | W1046 | TRISTRIP Satellite HOUSING .890 L | 1 |
| 2.6 | F24254 | Flat Head Cap Screw 5/16-18 x 3/4 Hex Drive | 2 |
| 2.7 | F4161246 | BEARING 5205 A-2RS1 or 3205-2RS | 1 |
| 2.8 | W1009 | Planetary Satellite Shaft, MALE THREADS BOTH SIDES | 1 |
| 2.9 | F68019 | Spring Steel External Retaining Ring 1 Inch | 1 |
| 2.10 | F33356 | 3/4" Belleville Washer .755 X 1.5 X .072, 1050/70 Plain | 1 |
| 2.11 | W1010L | Shaft Plate 4 1/2" LH Thread (with cimex pin tappings) | 1 |
| 2.12 | W6016 | "CIMEX" HUB PIN | 4 |
| 3 | W2010A | Idler Pulley ASM | 2 |
| 3.1 | W2010 | RETLAW PULLEY - 3.5 OD w/ 3/8 ID x 0.41 standoff adapter | 1 |
| 3.2 | F13110 | Bolt - HCS 3/8-16 x 1 3/4 Grade 5 Zinc | 1 |
| 3.3 | F37026 | Jam Nut - 3/8-16 Nylock NTE Zinc | 1 |
| 3.1 | F33006 | Flat Washer - 5/16 I.D. USS Zinc | 5 |
| 4 | W2206 | Double Sided Belt- 2000 For Tristrip | 1 |
| 5 | W5120-1 | 1-1/2" METAL PLUG FOR TRISTRIP & Hydra Disk | 1 |
| 6 | F24256 | Flat Head Cap Screw 5/16-18 x 1 Hex Drive | 4 |
| 7 | F37021 | Nut - 5/16-18 Nylock NE Zinc | 4 |
| 8 | ET10-BRUSH-A | 10" STRIPPING BRUSH w/ Rubber grommets | 3 |
| 9 | W1558A | 10 inch pad Driver -w/W1680-w/grommet | 3 |
| 10 | W10682 | Planetary Shaft ASM (See next page for details) | 1 |

Planetary Shaft (TX7)

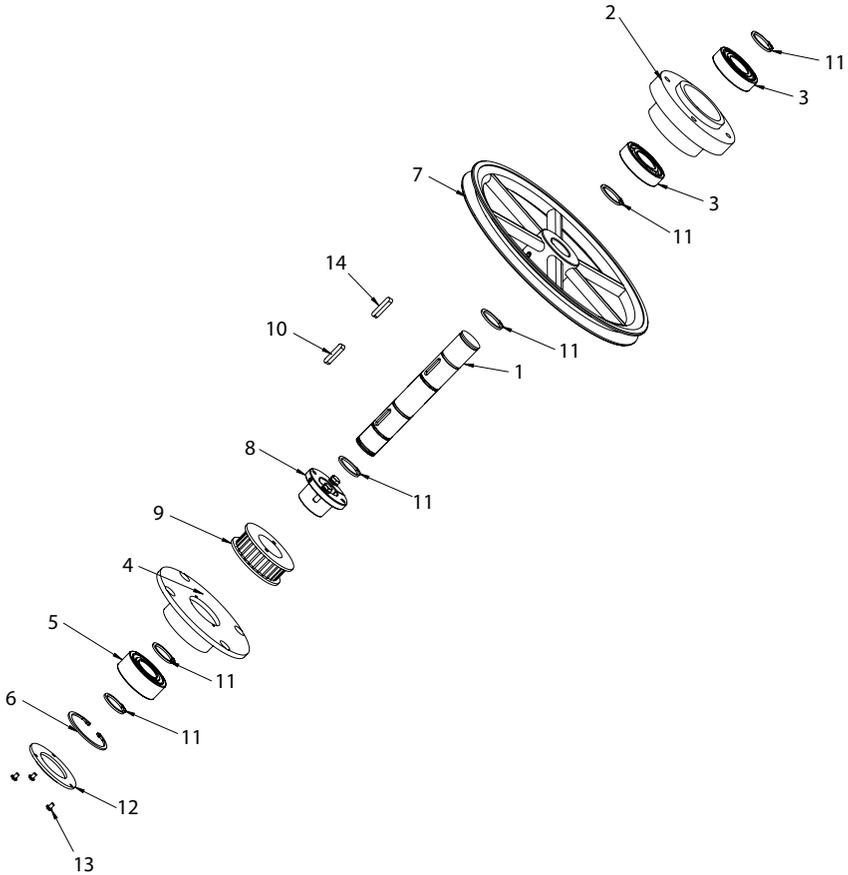

| Item | Part No. | Description | Qty |
|------|-----------|--|-----|
| 1 | W10681 | Main Shaft, Planetary | 1 |
| 2 | W10421 | Bearing Housing | 1 |
| 3 | W10419 | Bearing - 6206-2RZ, 30x62x16 mm | 2 |
| 4 | W1036 | TRISTRIP LOWER MAIN HOUSING | 1 |
| 5 | F4161248 | BEARING 5206 A2RS1/C3 | 1 |
| 6 | F68156 | INT R Ring 2 3/8 | 1 |
| 7 | W10424 | Pulley - 7.9 in | 1 |
| 8 | W2245 | Bushing - LX 1 3/16 IN | 1 |
| 9 | W2230 | SPROCKET P28 - 8M - 20 - QT | 1 |
| 10 | F0958935 | 1/4" x 1/4 x 1-1/4 Mach Key | 1 |
| 11 | F99450907 | RETAINING RING, EXTERNAL, 1 3/16 Shaft | 6 |
| 12 | W1037 | End Cap - Bearing Housing | 1 |
| 13 | F1128858 | Machine Screw PPH 8-32 x 1/4L | 3 |
| 14 | W10422 | Key - 1/4 x 1/4 x 28mm | 1 |

| "A" Class Service Parts - High Demand | |
|---|---|
| Part No. | Description |
| WBX51 | 51" Cogged Belt |
| W10549 | Dust Bag - 2 Pack |
| W10409 | Bonnet Filter - 9.0 ID x 3.25 H |
| K11013-0752 | Air Filter Inner Pleated - FS481V (603CC) |
| K49065-0721 | Oil Filter - FS481V (603CC) |
| W10656 | Bolt - HHCS Combo, M12x25, Zinc, 8.8 |
| W10547 | Kerf Dust Seal - 96 in. length, cut to fit |
| W10539 | Cap - Dust Chute |
| W10552 | Knob - Tee Handle Adjustment |
| W4110 | Throttle CABLE 53 INCH |
| W10482 | Wire Harness |
| W10490 | Glass Fuse - 3A, 5x20 |
| W10491 | Glass Fuse - 6A, 5x20 |
| "B" Class Service Parts - Medium Demand | |
| Part No. | Description |
| W10666 | Pad Driver ASM - 27" w/ Hex Hub, Bolt-Lock |
| W10667 | Pad Driver ASM - 24" w/ Hex Hub, Bolt-Lock |
| W10668 | Pad Driver ASM - 21" w/ Hex Hub, Bolt-Lock |
| W10433 | Pad Gripper Surface - 27" |
| W10434 | Pad Gripper Surface - 24" |
| W10435 | Pad Gripper Surface - 21" |
| W10518 | Shroud ASM - 27" |
| W10522 | Shroud ASM - 24" |
| W10521 | Shroud ASM - 21" |
| W2502-FK | LP Cylinder - 20LB Vertical, Steel, RH |
| W10658 | Front End ASM |
| W10366 | Vibration Isolating Spacer - 3/8-16 x M10 |
| W10517 | Rotary Tensioner ASM |
| W0091A | Emission Module ASM |
| PT-W2803 | O2 Sensor, Exhaust, Narrow Band |
| PT-10302 | Washer - Rubber Coated |
| W10388 | Catalyst Muffler ASM, 603cc |
| W10402 | High Pres. Hose ASM - 12 in |
| W10405 | Inline Propane Filter - 10 Micron |
| PT-10229 | Propane Carburetor Regulator 603cc, Body, Spring, Linkage |
| PT-W1325 | Oil Pressure Switch, SPST, N.O., 1/8 BSP |
| PT-W2608 | "Lockoff", 12V Propane Solenoid Shutoff Valve, A152 |
| K11060-7016 | EXHAUST GASKET 603cc & 852cc |
| PT-W1305 | Starter Solenoid Relay, 12V |
| W10410 | Support Bracket - Bonnet Filter |
| K11011-0787 | Cover - Air Filter, FS481V (603CC) |
| K11008-7050A | Cylin. Head Kit #1 Opr Right FS481V |
| K11008-7051A | Cylin. Head Kit #2 Opr Left FS481V |
| K14075-0707 | Oil Dipstick - FS481V (603CC) |
| K21163-0749 | 12V Starter - FS481V (603CC) |
| W10379 | Wheel - 6", Rubber, Smooth, Incl Bearings |
| W10378 | Hairpin - 57mm Length |
| W10380 | Wheel Axle |
| W10385 | Rear Caster - 3 in. |
| W10386 | Pad - LP Tank Bottom Support |
| W10413 | Key - 1/4 x 1/4 x 20mm |
| W10414 | Engine Pulley - 4 in. |
| W10416 | Set Screw - M6x12 |
| W10417 | Bearing Cover Plastic |
| F0474395 | BEARING 6206 2RS1/CS3 |
| W10422 | Key - 1/4 x 1/4 x 28mm |
| W10425 | Flex Plate |
| W10437 | Pad Holder - Male Threaded Flange |
| W10538 | Dust Chute - 27&24 in. Compatible |
| W10455 | Tank (Propane) Strap |
| W10465 | Clamp Mechanism |
| W10466 | Hairpin |
| W10475 | Ergonomic Grip w/ Clamps (1 grip) |
| W10479 | Tach Hour Meter 1 Pin |
| W10480 | Ignition Switch - Incl 2 Keys, Hardware, 5 pin Wire Harness |
| W10481 | Battery - Li-Ion 12V |
| W10484 | Circuit Board |

Labels & Literature

1

OPERATING INSTRUCTIONS

1. Check engine oil and fill to proper level.
2. Ensure fuel hoses are properly connected to propane cylinder and machine components.
3. Open the service valve on propane cylinder.
4. Turn ignition key to START. Do not engage starter for more than 6 seconds per attempt.
5. When engine starts, adjust throttle to proper speed.
6. Always stop engine by closing the service valve on propane cylinder. Once engine stops, turn key to OFF position.

Refer to operators manual for additional information, troubleshooting, and maintenance schedule.

Part No. W10022 "Preventative Maintenance Kit" includes: oil filter, bonnet filter, and all air filters.

2

3

4

WARNING

Muffler is HOT.
Do NOT touch.
Rotating pad and parts
under frame.
Keep hands and feet away.

5

⚠ DANGER

Read and understand Operator's Manual. Failure to follow instructions could result in death or serious injury.

Do NOT operate, store, or service machine near sources of heat or ignition such as open flames, spark, pilot lights, or cigarettes.

Do NOT release or bleed propane inside any building or other enclosed space or near an open pit.

Check for fuel leaks and damage to the propane cylinder prior to operating machine and storage.

Use only propane cylinders that withdraw vapor. Do NOT use an overfilled cylinder. 20 lb of fuel is the maximum.

Turn off service valve on propane cylinder when machine is not in use. Always store propane cylinder in an approved outside location.

The engine on this machine produces carbon monoxide (CO), a DEADLY, colorless, odorless, tasteless, non-irritating, and poisonous gas. Using machine in poorly ventilated area could result in serious injury or death to the operator and other bystanders.

Symptoms of carbon monoxide (CO) poisoning include headaches, dizziness, drowsiness, nausea, or lack of consciousness. If you or a bystander experience such symptoms, shut off the machine immediately and go outside for fresh air. Do NOT operate the machine again until it has been tested by a qualified technician.

6

7

8

JX SX

9

10

ONYX

11

ONYX

7781 S. Little Egypt Rd., Stanley, NC 28164
1-704-827-9366 www.onyxolutions.com

• MODEL No.

• SERIAL No.

PROUDLY ASSEMBLED IN THE USA

12

LX600 LX600

13

14

EMMISSION CONTROL INFORMATION

LEHR LLC, Stanley, NC 28164 ENGINE SERIAL NUMBER 6032L1

THIS ENGINE MEETS U.S. EPA EMISSION REQUIREMENTS FOR 2014 AND MEETS EUROPEAN EMISSION REQUIREMENTS FOR 2014 AND MEETS CANADIAN EMISSION REQUIREMENTS FOR 2014.

THIS ENGINE IS CERTIFIED TO OPERATE ON LIQUID PETROLEUM GAS (LPG).

EMERGENCY REPAIR INFORMATION: 1-800-4-A-LEHR

FOR MORE INFORMATION, VISIT WWW.LEHRMACHINES.COM

LEHR MACHINES HAS AN EMISSION CONTROL SYSTEM IN COMPLIANCE WITH THE U.S. 11, 13, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100.

15

ONYX

16

| Item | Part No. | Description | Qty |
|------|----------|--|-----|
| 1 | W10500 | Label - Operating Instruction | 1 |
| 2 | W10501 | Label - Keyswitch | 1 |
| 3 | W10502 | Label - Throttle | 1 |
| 4 | W10503 | Label - Warning, Hot & Moving Parts | 1 |
| 5 | W10504 | Label - Danger, Prop. Safety | 1 |
| 6 | W10505 | ONYX Trapezoid Label - Engine Shroud Front | 1 |
| 7 | W10506 | ONYX Label - Engine Shroud Side | 1 |
| 8 | W10507 | 3D Label - JX Brand | 1 |
| 9 | W10583 | 3D Label - SX Brand | 1 |
| 10 | W10508 | Label - ONYX Bubble | 1 |
| 11 | W10509 | Serial Plate - ONYX Brand | 1 |
| 12 | W10510 | Label - LX600 Brand | 1 |
| 13 | W10511 | Label - LX600 Brand | 1 |
| 14 | W10512 | Label - Emissions Certification 603L1 | 1 |
| 15 | W10513 | Label - ONYX Oval Nameplate | 1 |
| 16 | W10551 | Literature Kit - LP Floor Mach. | 1 |

ONYX

DESIGNED TO SHINE 

Parts & Service:

Online: www.OnyxSolutions.com
Email: sales@onyxsolutions.com
Call: 704-827-9368

ONYX Systems, LLC
12703 Commerce Station Drive
Suite 200
Huntersville, NC 28078
USA